


# Servotech Instrumentation Ltd

## LS3002

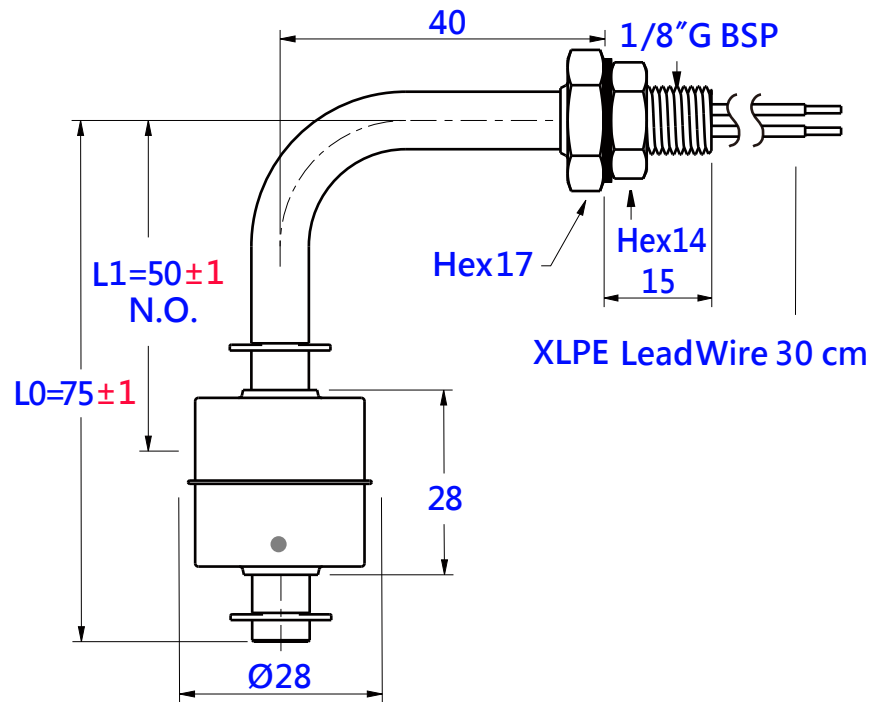

## LS3002

LS3002		
Mounting Style	Internal	Level Code
Mounting thread	1/8" G BSP	L0=75 ±1
stem	SUS 316	L1=50 ±1 ( N.O.)
Float	SUS 316L	
Operation Temp.	-20°C To +120°C	
Max.Pressure	10 bar	
Float S.G.	0.75	
Mini.Fluid S.G.	0.8	
Contact Form	Float Reversible , SPST	
Switch Rating VA	50W	
Switching Voltage Max.	240Vac/200Vdc	
Switching Current Max.	0.5	
Carry Current Max.	1A	
Lead Wires	UL 3266 AWG 22 XLPE Lead Wire 30 cm	