

## THERMOCOUPLE CABLE DATASHEET

### PVC Cable

**ORDERING CODE: WK07**

Inexpensive, flexible and can be water sealed

**Thermocouple:** Type K Extension Cable

**Temperature Range:** -20 to 105°C

**Strands/Core:** 20 AWG

### ANSI Colour Code

+ Conductor : Copper

- Conductor : Constantan Copper Nickel

### Insulation:

Flame Retardant Thermoplastic PVC

Screen + Drain Wire (7x0.3)

Nominal Diameter: 1.55mm ± 0.2

Colour: Red—Negative Yellow—Positive

### Outer Sheath:


Flame Retardant Thermoplastic PVC

Nominal thickness: 1.05mm

Colour: Yellow

### Dimensions:

Nominal diameter: 5.14mm (+/-0.3)

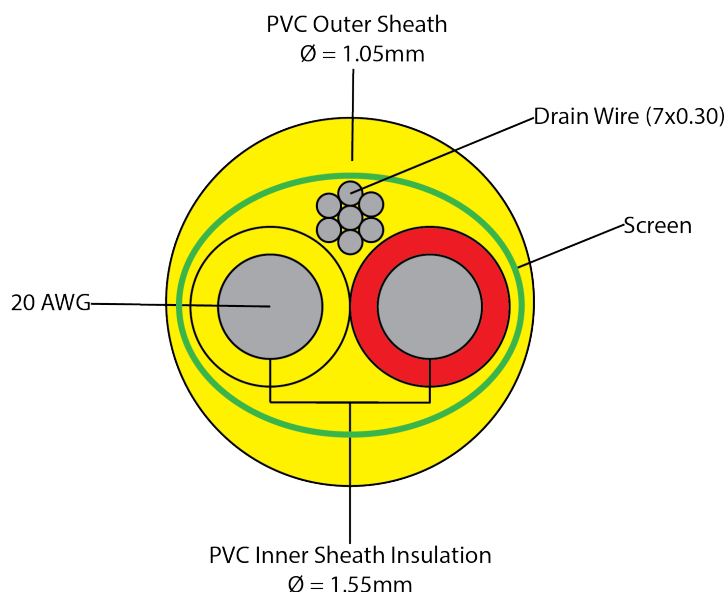

Servotech Instrumentation Ltd

6 William Pickering Drive | Rosedale | Auckland | New Zealand |



0800 737 868



www.servotech.co.nz



sales@servotech.co.nz

ISO 9001

BUREAU VERITAS  
Certification

