

THERMOCOUPLE CABLE DATASHEET

PVC Cable

ORDERING CODE: WK08

Inexpensive, flexible and can be water sealed

Thermocouple: Type K Extension Cable

Temperature Range: -20 to 105°C

Strands/Core: 16 AWG

ANSI Colour Code

+ Conductor : Copper

- Conductor : Constantan Copper Nickel

Insulation:

Flame Retardant Thermoplastic PVC

Screen + Drain Wire (7x0.3)

Nominal Diameter: 2.25mm ± 0.2

Colour: Red—Negative Yellow—Positive

Outer Sheath:


Flame Retardant Thermoplastic PVC

Nominal thickness: 1.91mm ± 0.5

Colour: Yellow

Dimensions:

Nominal diameter: 6.45mm (+/-0.3)

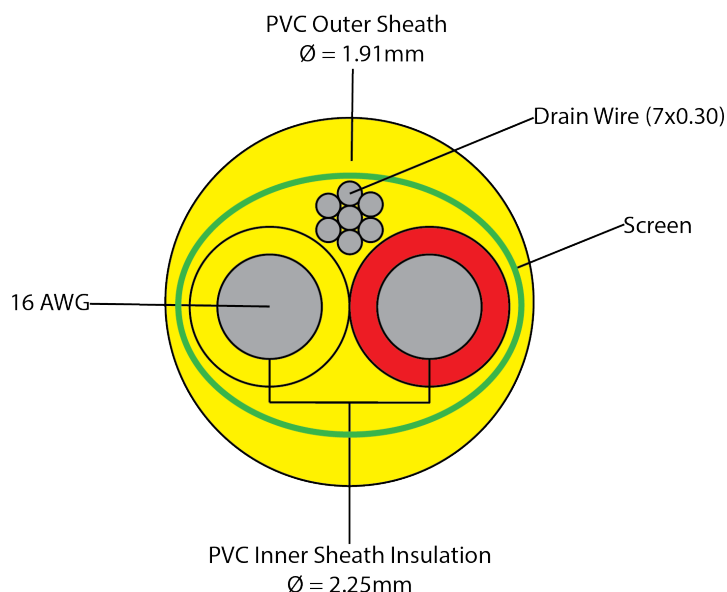

Servotech Instrumentation Ltd

6 William Pickering Drive | Rosedale | Auckland | New Zealand |



0800 737 868



www.servotech.co.nz



sales@servotech.co.nz

ISO 9001

BUREAU VERITAS
Certification

