

# THERMOCOUPLE CABLE DATASHEET

## Glass Fibre (SSOB) Cable

**ORDERING CODE: WK12**

Good temperature resistance but not suitable where fluids are present.

Stainless braiding for mechanical protection

**Thermocouple:** Type K Extension Cable

**Temperature Range:** 0-450°C

**Cable Type:** Flat twin cable

**Strands/Core:** 7/0.2

### ANSI Colour Code

+ Conductor : Nickel Chromium

- Conductor : Nickel Aluminium

Electrical Resistance of Conductors: 4500 Ohms/Km at 20°C

### Insulation:

Lapped Glass Yarn

Impregnation: Vinilic resin

Nominal Diameter: 1.05mm ( $\pm 0.01$ )

Colour Code: Red—Negative Yellow—Positive

### Second Layer

Braided Fibreglass

Impregnation: Vinilic resin

### Armour

Stainless Steel Wires


Wire Diameter: 0.13mm

Colour code: Yellow Textile Insert

### Dimensions:

Nominal Diameter: 3.1mm / 2.05mm ( $\pm 0.2$ )

Weight: 11.13kg/km

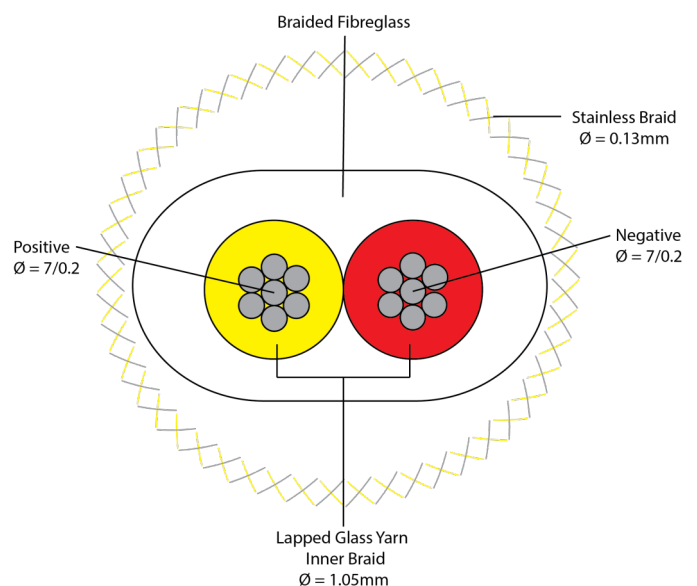

Servotech Instrumentation Ltd

6 William Pickering Drive | Rosedale | Auckland | New Zealand |



0800 737 868



www.servotech.co.nz



sales@servotech.co.nz

ISO 9001

BUREAU VERITAS  
Certification

