




Ex ia

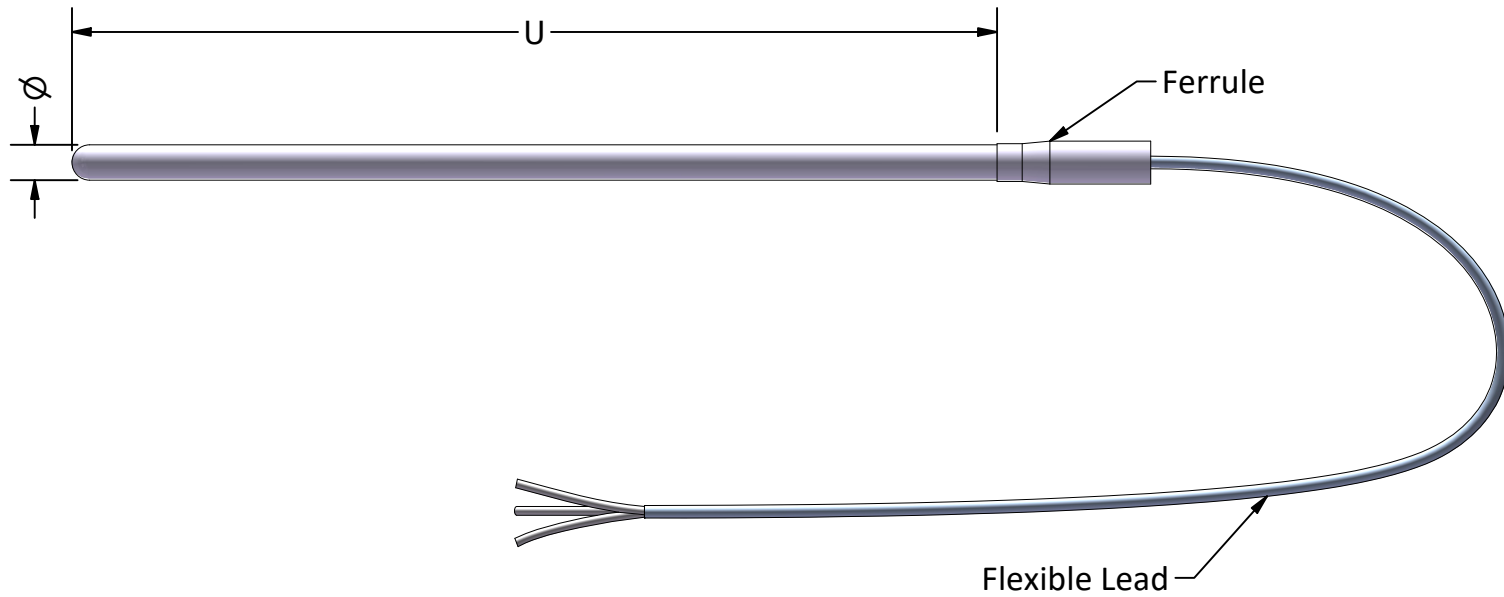

RANGE		STEM		LEAD	
Min Temp: _____ (°C)		3.0mm x _____		Length: _____	
		4.5mm x _____		2 Wire	<input type="checkbox"/>
Max Temp: _____ (°C)		6.0mm x _____		3 Wire	<input type="checkbox"/>
		9.5mm x _____		4 Wire	<input type="checkbox"/>
		Other: _____		6 Wire (Duplex)	<input type="checkbox"/>
SENSOR TYPE		LEAD MATERIAL		LEAD PROTECTION	
Pt100	<input type="checkbox"/>	PVC	<input type="checkbox"/>	Stainless Overbraid	<input type="checkbox"/>
Pt1000	<input type="checkbox"/>	Silicon	<input type="checkbox"/>	SS Spiral Armour	<input type="checkbox"/>
Duplex	<input type="checkbox"/>	Teflon	<input type="checkbox"/>	None	<input type="checkbox"/>
NTC: _____	<input type="checkbox"/>	Other: _____	<input type="checkbox"/>		
Other: _____	<input type="checkbox"/>				

SERVOTECH INSTRUMENTATION LTD 6 WILLIAM PICKERING DRIVE ALBANY AUCKLAND, NEW ZEALAND PHONE: 64-9-415 8362 FAX: 64-9-415 8361 EMAIL: sales@servotech.co.nz WEBSITE: www.servotech.co.nz			TITLE: Ex ia RTD PROBE WITH FLEXIBLE LEAD AND FERRULE	
			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN mm	DRAWN BY: DV APPROVED BY: KV DATE: 19/12/2022
THIS DRAWING IS EXCLUSIVE PROPERTY OF SERVOTECH INSTRUMENTATION LTD AND SHOULD NOT BE COPIED OR HANDED TO OTHER PARTIES WITHOUT PROPER PERMISSION.	GENERIC NUMBER: _____		A4	
	SCALE: NTS	MANUFACTURED IN NEW ZEALAND		