

# THERMOCOUPLE CABLE DATASHEET

## PVC Cable

**ORDERING CODE: WT04**

Inexpensive, flexible and can be water sealed

**Thermocouple:** Type T Extension Cable

**Temperature Range:** -20 to 105°C

**Cable Type:** Flat twin cable

**Strands/Core:** 7/0.2

### ANSI Colour Code

+ Conductor : Copper

- Conductor : Constantan Copper-Nickel

Electrical Resistance of Conductors: 2538 Ohm/Km at 20°C

### Insulation:

Flame Retardant Thermoplastic PVC

Nominal Diameter: 1.20mm

Colour Code: Red—Negative Blue—Positive

### Outer Sheath:


Flame Retardant Thermoplastic PVC

Nominal thickness: 4.1mm / 2.9mm (+/- 10%)

Colour Code: Blue

### Dimensions:

Weight: 12.02kg/km

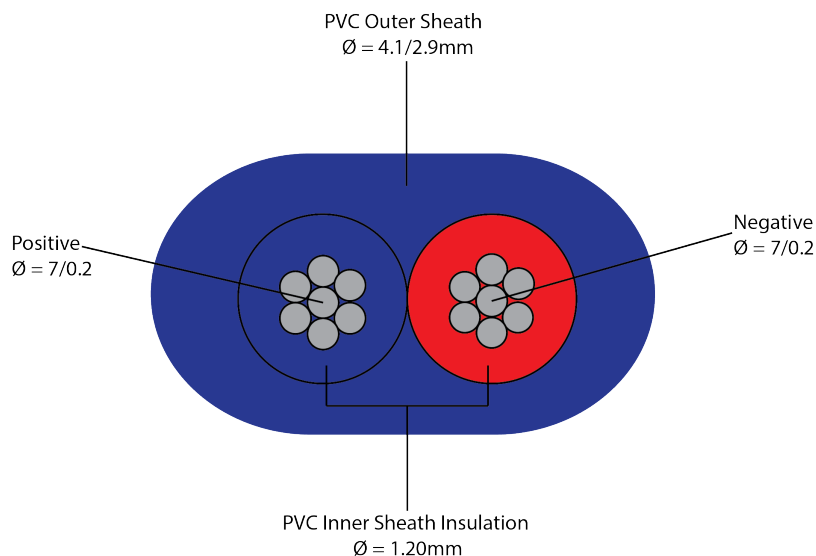

**Servotech Instrumentation Ltd**

6 William Pickering Drive | Rosedale | Auckland | New Zealand |



0800 737 868



www.servotech.co.nz



sales@servotech.co.nz

ISO 9001

BUREAU VERITAS  
Certification

