

# THERMOCOUPLE CABLE DATASHEET

## Teflon (SSOB) Cable

**ORDERING CODE: WT26**

Tough, waterproof, resistant to acids, and high strength.

Stainless braiding for mechanical protection

**Thermocouple:** Type T Extension Cable

**Temperature Range:** -200 to 260°C

**Cable Type:** Flat twin cable

**Strands/Core:** 7/0.2

### ANSI Colour Code

+ Conductor : Copper

- Conductor : Copper Constantan—Nickel

Electrical Resistance of Conductors: 4500 Ohms/Km at 20°C

### Insulation:

Fluoropolymer type Hyflon MFA

Nominal Diameter: 1.05mm ( $\pm 0.05$ )

Colour Code: Red—Negative Blue—Positive

### Outer Sheath:

Fluoropolymer type Hyflon MFA

Nominal thickness: 0.25mm

Colour: Blue

### Armour

Stainless Steel Wires


Wire Diameter: 0.13mm

Colour: Blue Textile Insert

### Dimensions:

Nominal Diameter: 3.1mm / 2.05mm (+/- 0.2)

Weight: 11.13kg/km

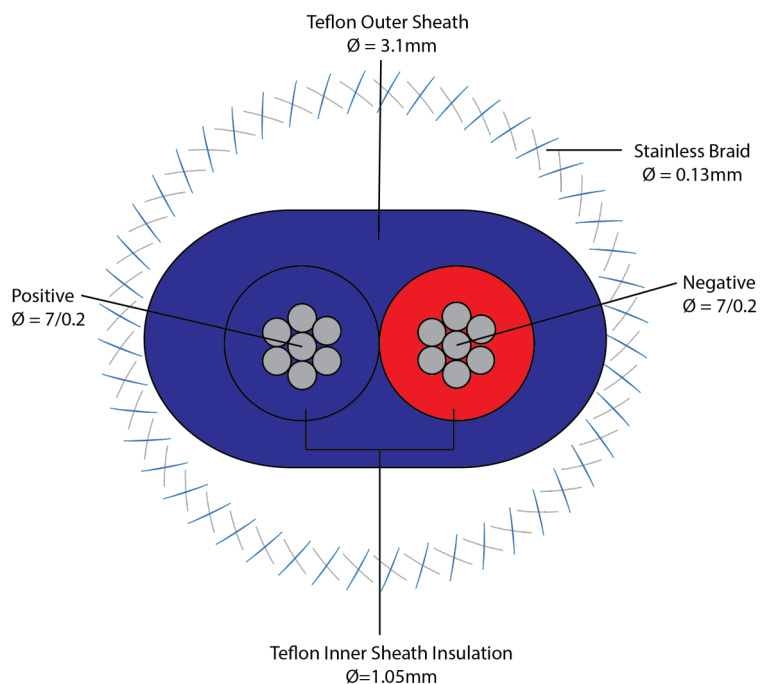

Servotech Instrumentation Ltd

6 William Pickering Drive | Rosedale | Auckland | New Zealand |



0800 737 868



www.servotech.co.nz



sales@servotech.co.nz

ISO 9001

BUREAU VERITAS  
Certification

